SP36DY – SP60DY Series

Desk-Top, Switch Mode Power Supply
RoHS Compliant, CEC Efficiency Level IV

Features:

- Available in C6 & C8 Input Socket
- Over-Voltage Protection
- Short Circuit Protection
- Over-Current Protection
- 100% Burn-In
- LED Indication
- 100% Hi-Pot Tested
- RoHS Compliant
- CEC Efficiency Level: IV

Input

Input Voltage	90 to 264 VAC
Input Frequency	47 to 63Hz
Input Current	1.8A Max
Safety Ground Leakage Current	0.75mA Max. @ 240VAC, Full Load

Output

Output Voltage & Current	***See Chart***
Ripple & Noise (P-P)	***See Chart***
Over-Voltage Protection	Auto Recovery
Over-Current Protection	Protected to Short Circuit Conditions, Auto Start
Temperature Coefficient	± 0.05% / °C Max.

Environmental

Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to 85°C
Relative Humidity	5% to 95% Non-Condensing

Electrical

Efficiency	Meets CEC Level IV Criteria
No Load Power Consumption	≤0.5 Watts
Hold-Up Time	10mS Min.
Line Regulation	±1% Max. at Full Load
Load Regulation	±5% Max. at Full Load
Inrush Current	80A Max.
Withstanding Voltage	4242 VDC from Input to Output, 2121 VDC from Input to Ground
Insulation Resistance	50 MΩ Min. from Output to Ground
Mean Time Between Failure (MTBF)	100,000 Hours Min., Full Load at 25°C Ambient

Safety

EMI Requirements	Meets Conduction Limits of: (A) FCC Part-15 Class B (B) CISPR-22 Class B
Safety Standards	Meets or Exceeds: (A) UL/c-UL (B) TUV (C) CE (D) CB (E) PSE (C8 Input, >15V Output) (G) DoIR+C-Tick (C8 Input Only)

TECHNOLOGIES INC. HICKSVILLE, NEW YORK • 264 Duffy Avenue Hicksville, NY 11801 • Tel: (516) 433-1313 Fax: (516) 433-1457 • Web: www.apxonline.com Email: sales@apxonline.com •
© Copyright 1978 APX Technologies, Inc.

Output Voltage and Current Chart

Model Number**	Output Voltage	Maximum Output Current	Ripple & Noise	Maximum Output Power
SP36DYXXR	12 - 17 VDC	3.0 A	150mV, P-P	36W
SP36DYXXR	18 - 24 VDC	2.0 A	240mV, P-P	36W
SP50PYXXR	12 - 17 VDC	4.2 A	150mV, P-P	56W
SP60PYXXR	18 - 24 VDC	3.2 A	240mV, P-P	60W

** To Determine Part Number:

- Replace "Y" with Required Input Socket Style Designation (C6 = "6", C8 = "8")
- Repace "XX" with Required Output Voltage (12VDC = "12", 24VDC = "24", etc.)

Example: SP60D**8**24 R indicates a 24VDC Unit with a C8 Input Socket.

Note:
Output conntector to be specified
Standard Connecter is a 6 ft. cable with 2.5 x 5.5 x 11mm Female Barrel Plug, Center Positive (+)

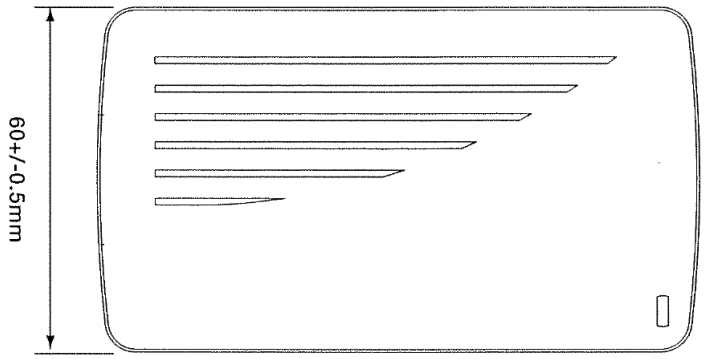

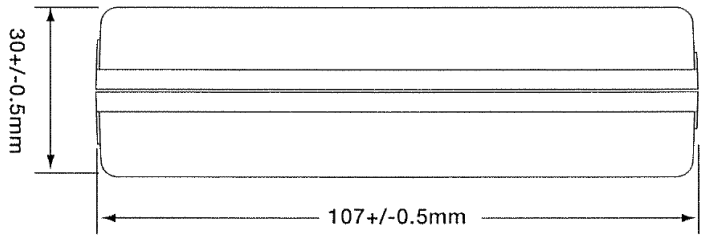

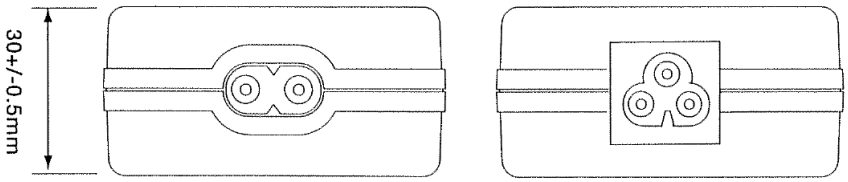

C8 C6

© Copyright 1978 APX Technologies, Inc.