



SP80D – SP90D Series

Desk-Top, Switch Mode Power Supply
RoHS Compliant, CEC Efficiency Level IV

Date: 1/23/08

Rev: 012308

Page: 1 of 2



Features:

- Active PFC
- Over-Voltage Protection
- Short Circuit Protection
- Over-Current Protection
- 100% Burn-In
- LED Indication
- 100% Hi-Pot Tested
- RoHS Compliant
- CEC Efficiency Level: IV



Input

Input Voltage	90 to 264 VAC
Input Frequency	47 to 63Hz
Input Current	2.5A Max
Safety Ground Leakage Current	0.75mA Max.
No Load Power Consumption	≤0.5 Watts

Output

Output Voltage & Current	<i>See Chart</i>
Ripple & Noise (P-P)	<i>See Chart</i>
Over-Voltage Protection	Auto Recovery
Over-Current Protection	Protected to Short Circuit Conditions, Auto Start
Temperature Coefficient	± 0.05% / °C Max.

Environmental

Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to 85°C
Relative Humidity	5% to 95% Non-Condensing

Electrical

Efficiency	Meets CEC Level IV Criteria
Hold-Up Time	10mS Min.
Line Regulation	±1% Max. at Full Load
Load Regulation	±5% Max. at Full Load
Inrush Current	80A Max.
Withstanding Voltage	4242 VDC from Input to Output, 2121 VDC from Input to Ground
Insulation Resistance	50 MΩ Min. from Output to Ground
Mean Time Between Failure (MTBF)	100,000 Hours Min., Full Load at 25°C Ambient

Safety

EMI Requirements	Meets Conduction Limits of: (A) FCC Part-15 Class B (B) CISPR-22 Class B
Safety Standards	Meets or Exceeds: (A) UL (B) C-UL (C) TUV (D) CE (E) CB (F) PSB (≥18V Output Only) (G) PSE (>15V Output Only) (H) FCC (C6 Input Only) (I) BSMI (C6 Input Only) (J) CCC (C6 Input Only) (K) DoIR+C-Tick (C6 Input Only) (L) Gost-R (C6 Input Only) (M) eK (C6 Input, ≥18V O/P Only)



SP80D – SP90D Series

Desk-Top, Switch Mode Power Supply
RoHS Compliant, CEC Efficiency Level IV

Date: 1/23/08

Rev: 012308

Page: 2 of 2

Output Voltage and Current Chart

Model Number**	Output Voltage	Maximum Output Current	Ripple & Noise	Maximum Output Power
SP80D _Y XXR	12 - 17 VDC	6.6 A	200mV, P-P	80W
SP90D _Y XXR	18 - 24 VDC	4.75A	240mV, P-P	90W

** To Determine Part Number:


- Replace "Y" with Required Input Socket Style Designation (C6 = "6", C8 = "8")
- Replace "XX" with Required Output Voltage (15VDC = "15", 24VDC = "24", etc.)

Example: SP90D824R indicates a 24VDC Unit with a C8 Input Socket.

Note:

Output connector to be specified.

Standard Termination is a 4 ft. cable with 5-Pin Din Plug.

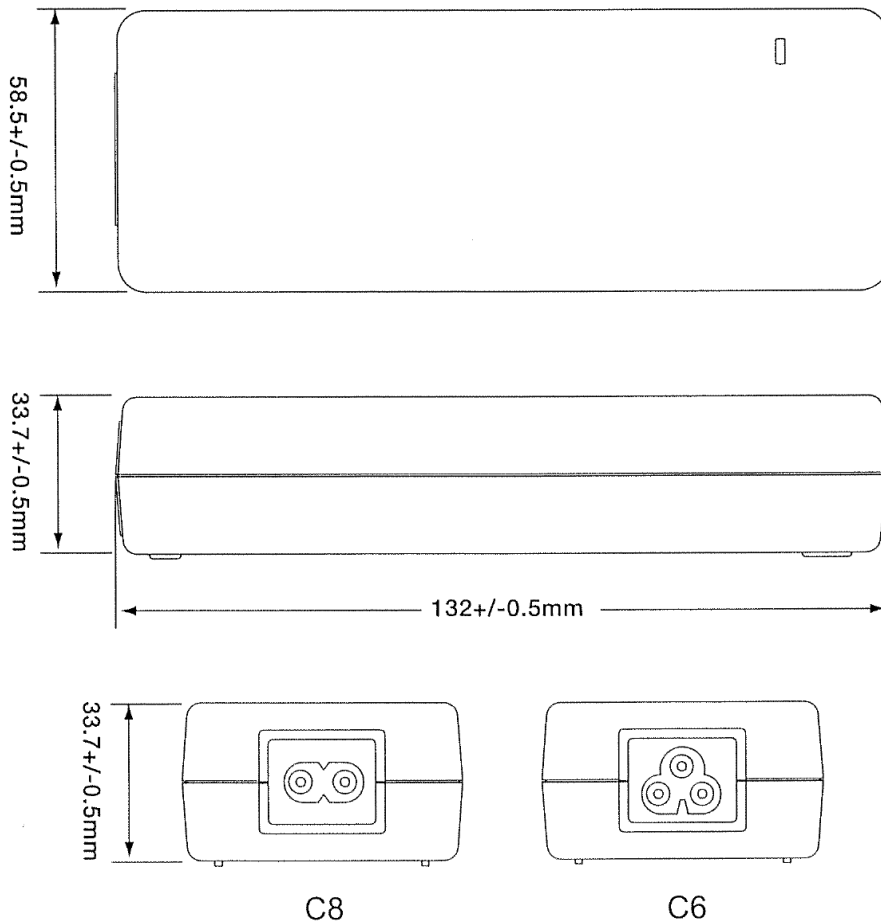

TECHNOLOGIES INC.
HICKSVILLE, NEW YORK

264 Duffy Avenue
Hicksville, NY 11801

Tel: (516) 433-1313
Fax: (516) 433-1457

Web: www.apxonline.com
Email: sales@apxonline.com

© Copyright 1978
APX Technologies, Inc.