



Features:

- Universal Input 100 – 240 VAC
- Active Power Factor Correction
- Internal EMI Filter
- Single Outputs 5 – 40VDC
- Input Surge Current Protection
- Over-Current Protection
- Over-Voltage Protection
- 100% Burn-In
- RoHS Compliant



Input

Input Voltage	90 to 260 VAC
Input Frequency	47 to 63Hz
Power Factor Correction	1.0 Max.
Input Current	1.7A @ 115VAC, 0.8A @ 230VAC, Full Load
Safety Ground Leakage Current	0.1mA Max. @ 240VAC, Full Load

Output

Output Voltage & Current	See Chart
Ripple & Noise (P-P)	1% Max., Full Load @ 90VAC Input
Over-Voltage Protection	Set at 112 - 132% of Nominal Output Voltage
Over-Current Protection	Set at 110 - 150% of Nominal Output Current
Temperature Coefficient	± 0.04% / °C Max.
Transient Response	Full Load to Half Load @ 100VAC Input: 4mS Max.

Environmental

Operating Temperature	0°C to 70°C
Derating	Derated from 100% at +50°C to 50% at +70°C
Storage Temperature	-40°C to 85°C
Relative Humidity	5% to 95% Non-Condensing

Electrical

Efficiency	88% Max.
Hold-Up Time	16mS Min.
Line Regulation	±1% Max. at Full Load
Load Regulation	±5% Max. at 230VAC
Inrush Current	54A @ 115VAC Max. 63A @ 230VAC Max. at 25°C Cold Start
Withstanding Voltage	5656 VDC from Input to Output, 2828 VDC from Input to Ground
Insulation Resistance	50 MΩ Min. from Output to Ground
Mean Time Between Failure (MTBF)	100,000 Hours Min., Full Load at 25°C Ambient

Safety

EMI Requirements	Meets Conduction Limits of: (A) CISPR-11 Class B (B) FCC Part 18 Class B
Safety Standards	Meets or Exceeds: (A) UR Listed (UL 60601-1) (B) TUV/T-Mark (EN 60601-1) (C) FCC (D) CE (E) CB



SFM120P Series

Switchmode Medical Power Supply,
Open Frame, RoHS Compliant

Date: 2/16/11

Rev: 010311

Page: 2 of 3

Single Output Voltage and Current Chart

Model Number**	Output Voltage	Output Current	Total Regulation	Maximum Output Power
SFM120P1XXR	5 - 6 VDC	20.00 - 16.66 A	5%	100W
SFM120P1XXR	6 - 9 VDC	18.33 - 12.22 A	5%	110W
SFM120P1XXR	9 - 11 VDC	13.33 - 10.90 A	4%	120W
SFM120P1XXR	12 - 13 VDC	10.0 - 9.23 A	3%	120W
SFM120P1XXR	14 - 16 VDC	8.57 - 7.50 A	3%	120W
SFM120P1XXR	17 - 21 VDC	7.06 - 5.71 A	3%	120W
SFM120P1XXR	22 - 27 VDC	5.45 - 4.44 A	2%	120W
SFM120P1XXR	28 - 33 VDC	4.29 - 3.63 A	2%	120W
SFM120P1XXR	34 - 40 VDC	3.53 - 3.00 A	2%	120W

** To Determine Part Number:

Replace "XX" with Required Output Voltage (5VDC = "05", 12VDC = "12", 48VDC = "48", ect.)

Note: SFM120P Series is also available with a 6-position barrier strip
(See "optional" part of diagram).

For 6-position barrier strip, order as SFM120P1XXAR.

Example: SFM120P124AR indicates a 24VDC Unit with 6-position Barrier Strip Output.

Pin Connection: SFM120P1XXR

Pin	12-Pin Molex Crimp Terminal
1 - 6	Common
7 - 12	V Output

Pin Connection: SFM120P1XXAR

Pin	6-Position Barrier Strip
1 - 3	Common
4 - 6	V Output




TECHNOLOGIES INC.
HICKSVILLE, NEW YORK

264 Duffy Avenue
Hicksville, NY 11801


Tel: (516) 433-1313
Fax: (516) 433-1457

Web: www.apxonline.com
Email: sales@apxonline.com

© Copyright 1978
APX Technologies, Inc.

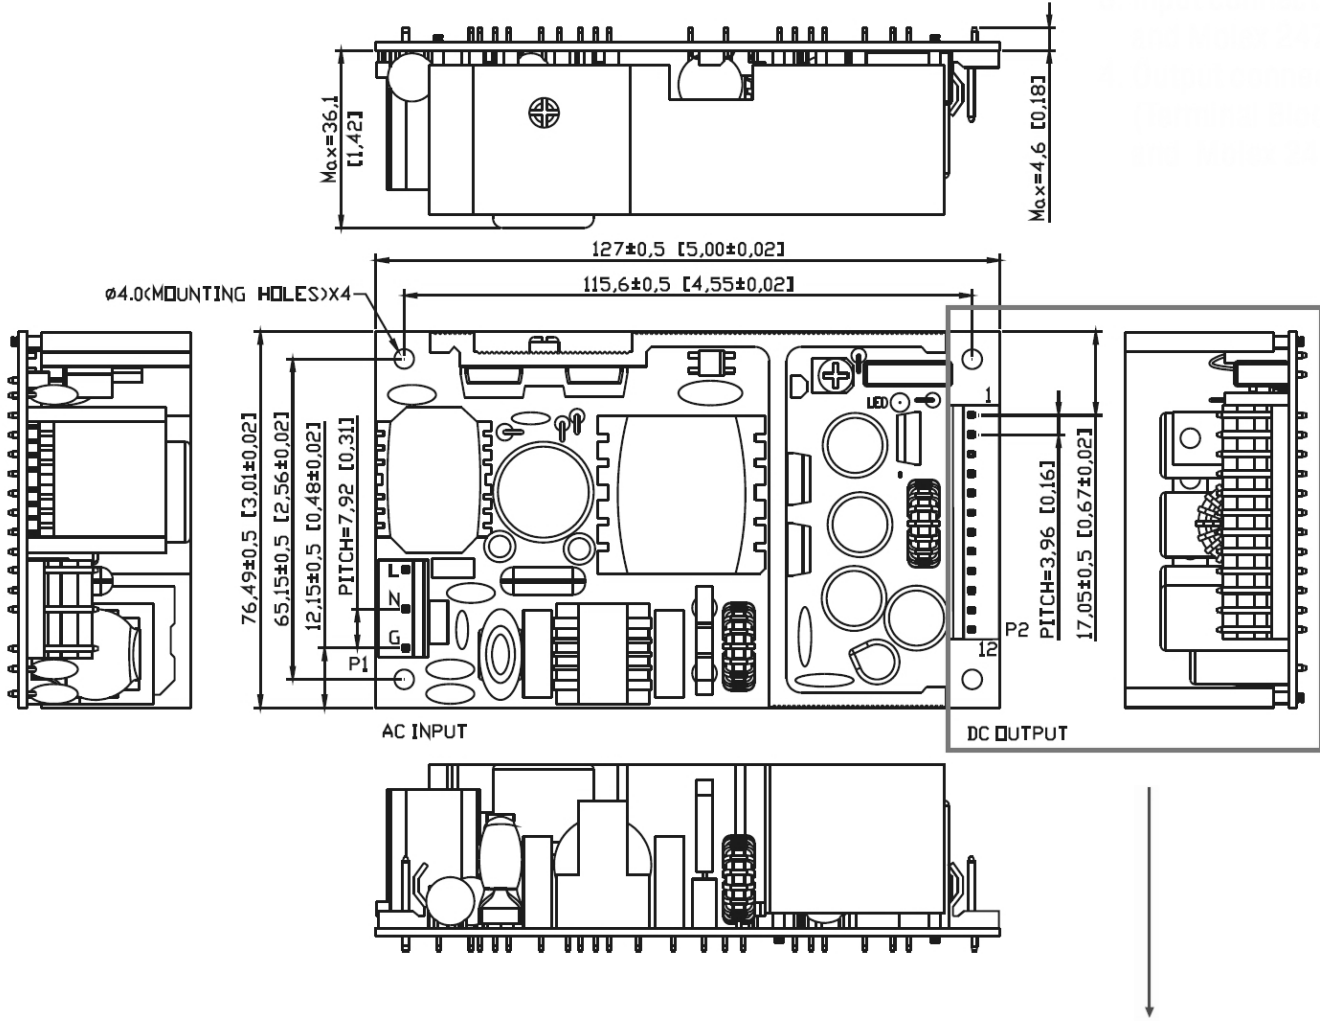

(Optional)

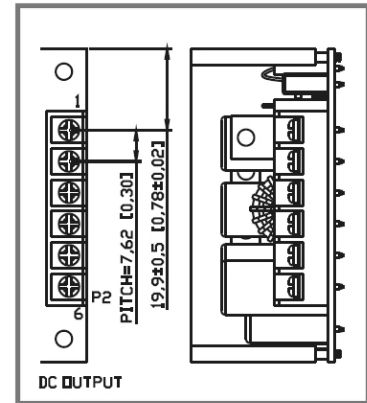

SFM120P1XXAR